



CH Series

**SPECIFICATIONS**

- Heavy Gauge Cold Rolled Steel Housing
- Baked White Enamel Finish
- Highly Efficient Fixture
- Minimum 87% Reflectivity
- T12, T8, or T5 Lamp Fluorescent Types
- LED T8 (BC) Ballast Capitable or (BP) By-Pass
- Available in 15", 18", 24", 36", 48", 72" & 96"
- Units Equipped with Knockouts and Holes for Pendant Mounting (Conduit by Others)
- Optional Lamped
- Optional Fuse
- Optional Emergency Battery
- Optional Tandem
- Optional Wire Guard

**APPLICATIONS**

- General Area Lighting
- Schools, General Commercial, Retail, Hospitals
- Warehouses, Industrial, Storage Areas

**ELECTRICAL**

- 120-277V; 50/60Hz

**INSTALLATION**

- Surface, Chain or Pendant Mount (Conduit by Others)

**CERTIFICATIONS/LISTINGS**

- UL Listed
- Listed for Damp Locations


MEMPHIS  
LIGHTING

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

**EXAMPLE:** CH 2 F32T8 UNV L841

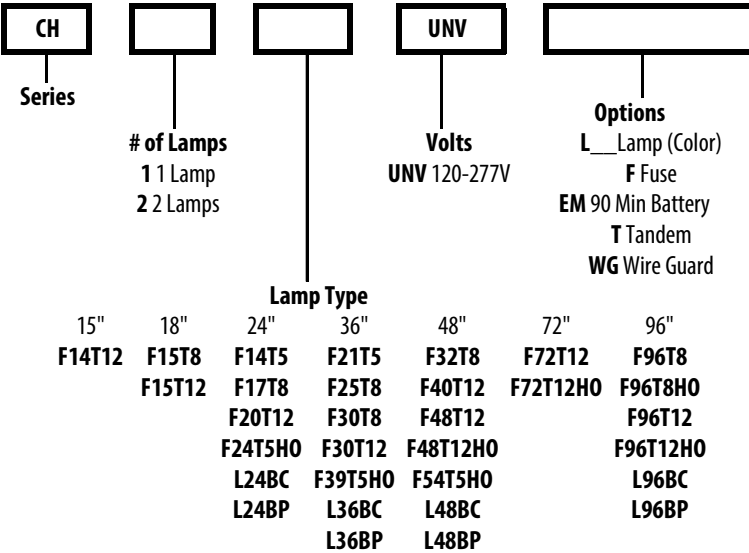

**SPECIFICATIONS**

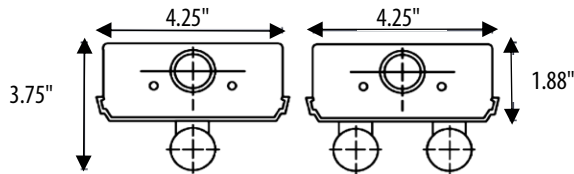

**OPTIONS/ACCESSORIES**



WG Wire Guard

AMERICA  
LIGHT

Specifications Subject to Change