

FLM Series

Medium Flood



FLM Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Aluminum Reflector (Non LED)
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Surge Protection
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120V: HPS 35W, 50W, 70W, 100W & 150W
- UNV: CF 26W, 32W, 42W, 52W & 64W & LED 22W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W
- 480V: LED 22W & HPS & MH 100W & 150W

INSTALLATION

- Mounts with 1/2" Threaded Knuckle or Optional Adjustable Slip Fitter

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations



PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: FLM M 150 Q L

FLM							
Series	Light Source	LED Color			Options		
	H High Pressure Sodium M Metal Halide F Compact Fluorescent L Light Emitting Diodes	___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED			L Lamped ASF Adjustable Slip Fitter SP Surge Protection D10 0-10V Dimming (LED) WG Wire Guard GS Glare Shield VG Vandal Guard CC Custom Color		
		Watts			Volts		
		HPS	MH	CF	2CF	LED	
		35	50	26	52	22	120 120V
		50	70	32	64		UNV 120-277V
		70	100	42			Q 120/208/240/277V
		100	150				480 480V
		150					

SPECIFICATIONS

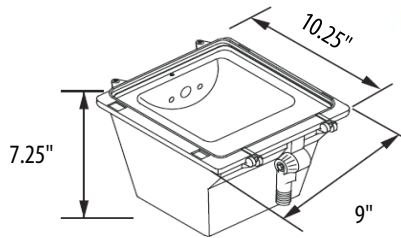

OPTIONS/ACCESSORIES

ASF Adjustable Slip Fitter	WG Wire Guard	GS Glare Shield	VG Vandal Guard



Specifications Subject to Change