

FLMS Series

Medium Flood Spot



FLMS Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Aluminum Spot Reflector
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Memium Base 4KV Socket
- Stainless Steel Hardware
- Multiple Light Source Options
- Optional Surge Protection
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120V: HPS 35W, 50W, 70W, 100W & 150W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W

INSTALLATION

- Mounts with 1/2" Threaded Knuckle or Optional Adjustable Slip Fitter

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLMS M 100 Q L

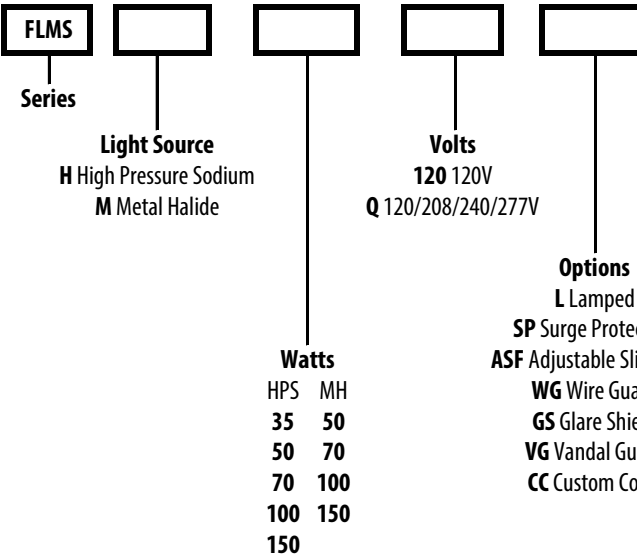

SPECIFICATIONS

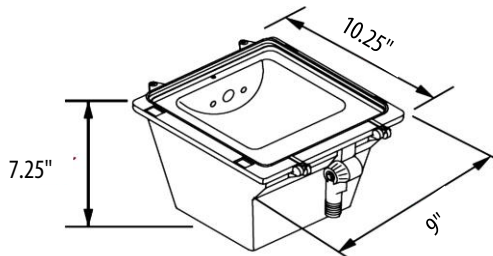

OPTIONS/ACCESSORIES

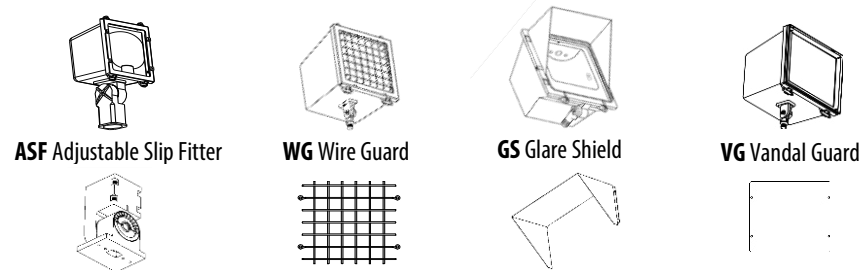

Specifications Subject to Change

