



IT Series

SPECIFICATIONS

- Heavy Gauge Cold Rolled Steel
- White Perforated Metal Basket with White Opal Acrylic Diffuser Inlay
- T12, T8 or T5 Lamp Fluorescent Types Available
- LED T8 (BC) Ballast Capitable or (BP) By-Pass
- 2x2 or 2x4 Configurations
- Low Gloss, High Reflectivity Powder Coat Finish
- Standard Troffer Mounting for Easy Installation in T-bar Ceiling
- Optional Lamped
- Optional Whip
- Optional Fuse
- Optional Emergency Battery

APPLICATIONS

- General Area Lighting
- Schools, General Commerical, Retail, Hospitals
- Offices, Conference Rooms, Storage Areas

ELECTRICAL

- 120-277V; 50/60Hz

INSTALLATION

- Recessed Mount in Ceiling Grid

CERTIFICATIONS/LISTINGS

- UL Listed


MEMPHIS
LIGHTING

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: IT 24 3 F32T8 UNV L841

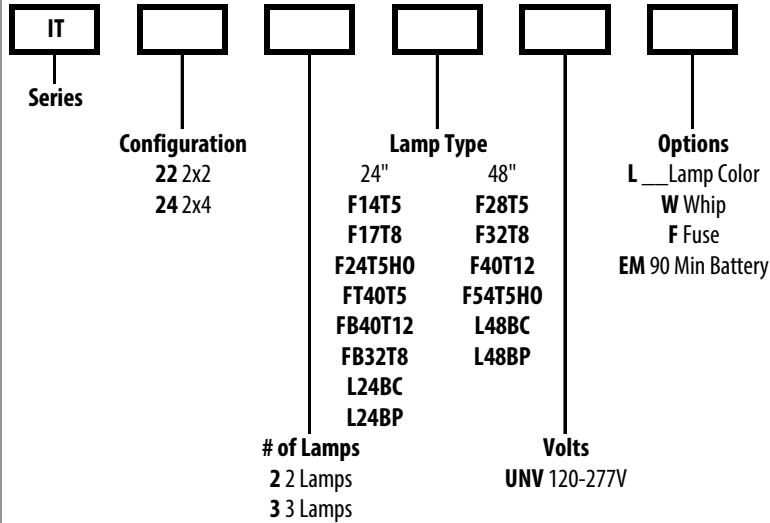

SPECIFICATIONS

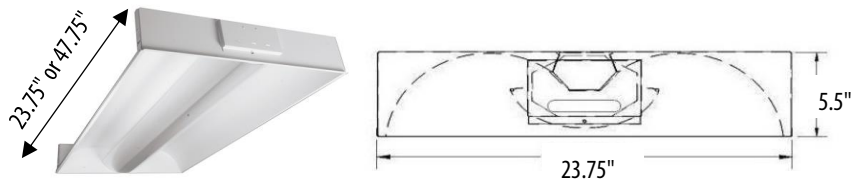

OPTIONS/ACCESSORIES

Specifications Subject to Change

