


RCN Series

Recessed Can New Construction

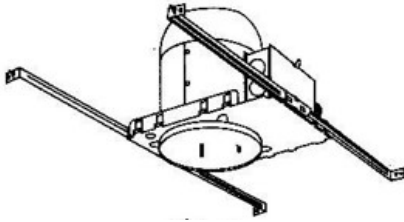

RCN Series

SPECIFICATIONS

- Recessed Downlight
- Fits 4", 5", 6" or 8" Recessed Fixtures
- White Trim Standard
- New Construction Downlight
- Multiple Lamp Source Options
- Optional Emergency Battery

APPLICATIONS

- General Area Lighting
- Offices, Residential, Retail Stores
- Hospitals, Restrooms, Corridors

ELECTRICAL

- 12V 50/60Hz; LV 20W, 35W & 50W
- 120V 50/60Hz
- 277V 50/60Hz
- UNV 50/60Hz

INSTALLATION

- Recessed Mount

CERTIFICATIONS/LISTINGS

- UL Listed
- CSA Listed
- Listed for Damp Locations

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE:



Series

Light Source

- I Incandescent
- LV Low Voltage
- F Compact Fluorescent
- M Metal Halide

Size

- 4 4"
- 5 5"
- 6 6"
- 8 8"

Options

- IC Insulation Contact
- AT Air Tight
- SL Slope
- LP Low Profile
- EM 90 Min Battery


Lamp Option

I	LV	CF	2CF	M
60	20	13	26	50
100	35	18	36	70
	50	26	52	100
				150

Volts

- 12 12V
- 120 120V
- 277 277V
- UNV 120-277V

SPECIFICATIONS

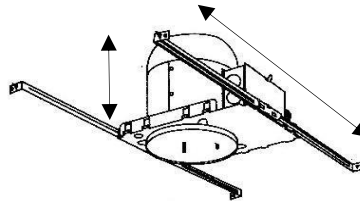

OPTIONS/ACCESSORIES

MEMPHIS
LIGHTING

Specifications Subject to Change

