

RCR Series

SPECIFICATIONS

- Recessed Downlight Retrofit
- Fits 4", 5", 6" or 8" Recessed Fixtures
- White Trim Standard
- Designed to Retrofit into Existing Openings
- Multiple Lamp Source Options
- Optional Emergency Battery (CF)

APPLICATIONS

- General Area Lighting
- Offices, Residential, Retail Stores
- Hospitals, Restrooms, Corridors

ELECTRICAL

- 12V; 50/60Hz; LV 20W, 35W & 50W
- 120V; 50/60Hz; I 60W & 100W
- 277V; 50/60Hz; CF 13W, 18W, 26W, 32W, 42W, 36W, 52W & 84W
- UNV; 50/60Hz; CF 13W, 18W, 26W, 32W, 42W, 36W, 52W & 84W & MH 50W, 70W, 100W & 150W

INSTALLATION

- Recessed Mount

CERTIFICATIONS/LISTINGS

- UL Listed
- CSA Listed
- Listed for Damp Locations

MEMPHIS
LIGHTING


PROJECT _____ TYPE _____
 QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: RCR I 100 6 120

RCR					
Series					
	Light Source			Size	Options
	I Incandescent			4 4"	IC Insulatoin Contact
	LV Low Voltage			5 5"	AT Air Tight
	F Compact Fluorescent			6 6"	SL Slope
	M Metal Halide			8 8"	LP Low Profile
					EM 90 Min Battery (CF)
		Lamp Option		Volts	
		I LV CF 2CF M		12 12V	
		60 20 13 26 50		120 120V	
		100 35 18 36 70		277 277V	
		50 26 52 100		UNV 120-277V	
		32 84 150			
		42			

SPECIFICATIONS

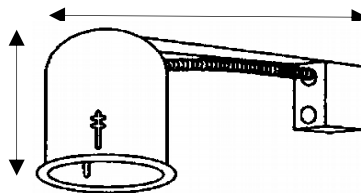

OPTIONS/ACCESSORIES

Specifications Subject to Change

