

# SMA LED Series

# Stealth Medium LED Area Light



SMA LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Heat Resistant Polycarbonate Lens
- Bronze Powder Coat Finish
- Modular LED Bars
- Universal Volt LED Driver 120-277V
- Type III or Type V Light Distribution
- 3K, 4K or 5K LED Color Options
- Multiple Mounting Options
- Optional Photocell (Field Installed)

**APPLICATIONS**

- General Area Lighting
- Parking, Roadway
- Industrial Parks, Public Transportation, Airports
- Office Buildings, Medical Facilities, Communities

**ELECTRICAL**

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 80 Watts; 9,725 Lumens; 3000K
- 80 Watts; 10,033 Lumens; 4000K
- 80 Watt; 10,342 Lumens; 5000K
- 100 Watt; 12,158 Lumens; 3000K
- 100 Watt; 12,105 Lumens; 4000K
- 100 Watt; 12,353 Lumens; 5000K
- 150 Watt; 19,887 Lumens; 3000K
- 150 Watt; 18,486 Lumens; 4000K
- 150 Watt; 18,752 Lumens; 5000K

**INSTALLATION**

- Mounts with Arm Mount, Adjustable Slip Fitter or U-Bracket

**CERTIFICATIONS/LISTINGS**

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

**EXAMPLE: SMA L 80 T5 40K UNV**

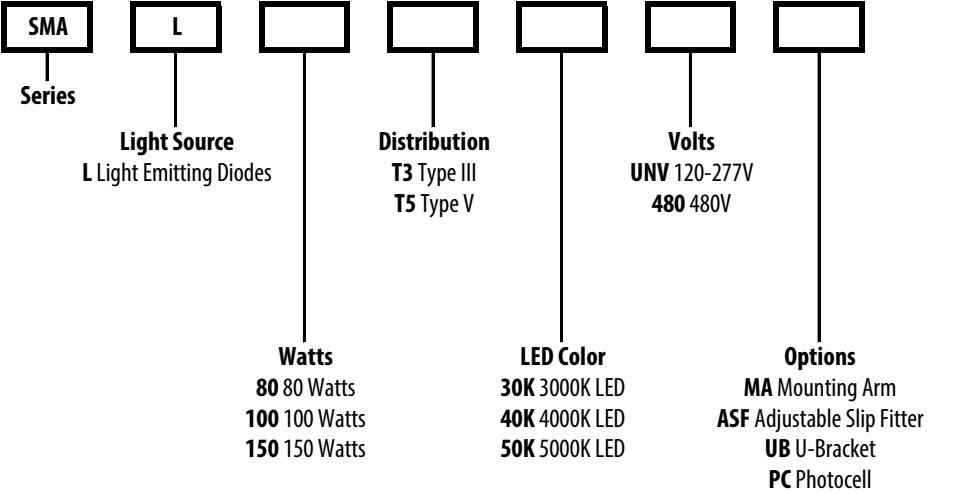

**SPECIFICATIONS**

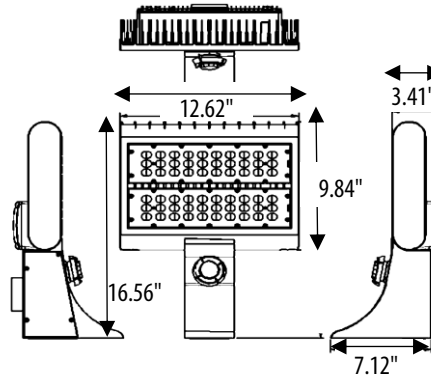

**OPTIONS/ACCESSORIES**



MA Mounting Arm



ASF Adjustable Slip Fitter



UB U-Bracket



Specifications Subject to Change