

AMA LED Series

Aurora Medium LED Area Light



AMA LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing and Front Frame
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- Aluminum Substrate CRI LED Board
- Universal Volt Electronic LED Driver 120-277V
- 3K, 4K, 5K or TFL Amber LED Color Options
- Integral Heat Sinking
- Optional Surge Protection
- Optional Glare Shield

APPLICATIONS

- General Area/Pathway Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 56 Watts; 7,127 Lumens
- 74 Watts; 9,418 Lumens
- 112 Watts; 14,253 Lumens
- 78 Watts; 2,607 Lumens (TFL Amber)

INSTALLATION

- Mounts with an Optional Arm Mount, 90° Slip Fitter, Wall Bracket, Adjustable Slip Fitter, Round Pole Adaptor, U-Bracket or Large Yoke

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: AMA L 56 40K UNV

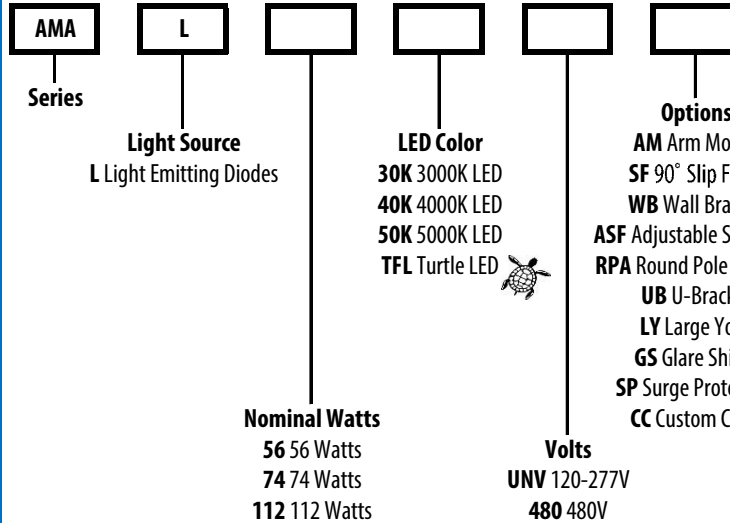

SPECIFICATIONS

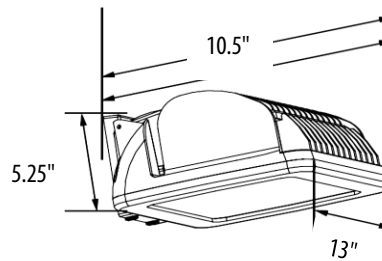

OPTIONS/ACCESSORIES



AM Arm Mount



SF 90° Slip Fitter



WB Wall Bracket



ASF Adjustable Slip Fitter




RPA Round Pole Adaptor



UB U-Bracket



LY Large Yoke



GS Glare Shield

Specifications Subject to Change

