

IT LED Series

LED Direct Indirect Troffer



IT LED Series

SPECIFICATIONS

- Heavy Gauge Cold Rolled Steel Housing
- White Perforated Metal Basket with White Opal Acrylic Diffuser Inlay
- CRI LED Light Engine
- Universal Volt LED Driver 120-277V, Optional Dimming
- 35K, 40K or 50K LED Color Options
- Optional Emergency Battery

APPLICATIONS

- General Area Lighting
- Schools, General Commercial, Retail, Hospitals
- Warehouses Industrial, Storage Areas

ELECTRICAL

- 120-277V; 50/60Hz
- 26 Watts; 3,275 Lumens
- 48 Watts; 5,970 Lumens

INSTALLATION

- Recessed Mount in Ceiling Grid

CERTIFICATIONS/LISTINGS


- UL Listed
- Listed for Damp Locations

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: IT L 48 40K UNV

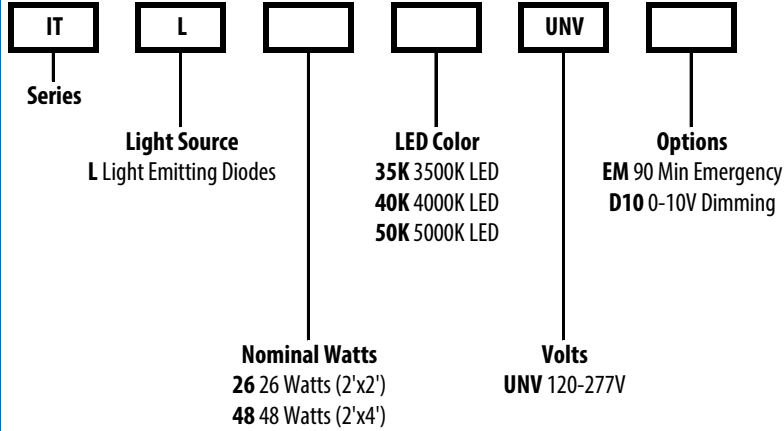

SPECIFICATIONS

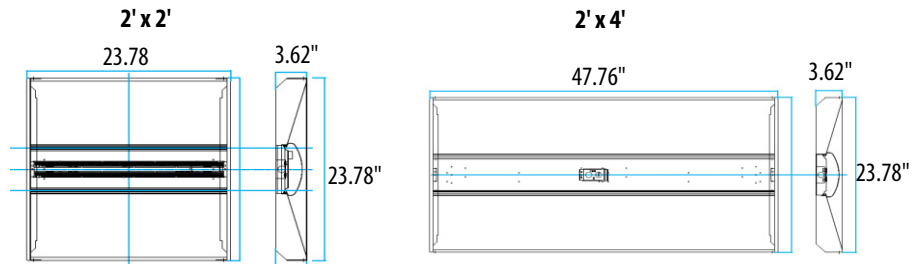

OPTIONS/ACCESSORIES



Specifications Subject to Change

