

ARL Amber LED Series

Aero Ray Large Amber LED



ARL Amber LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing and Front Frame
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- Monochromatic Amber LED Light
- Turtle Friendly, LEDs Operates Between 585 Nanometers and 595 Nanometers
- Integral Heat Sinking
- Optional Surge Protection
- Optional Dimming
- Optional House Side Shield

APPLICATIONS

- General Area/Pathway Lighting
- Entries, Walkways, Roadway, Area
- Schools, Hospitals, Office, Commercial Buildings

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 76 Watts; 8,825 Lumens
- 164 Watts; 18,691 Hi- Lumens

INSTALLATION

- Various Mounting Options (See Options)

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations



PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:



Series

Light Source
L Light Emitting Diodes

Watts
76 76 Watts
164 164 Watts

LED Color
TFL Turtle LED





Volts
UNV 120-277V
480 480V


EXAMPLE: ARL L 164 TFL UNV

- Options
- AM Arm Mount
 - SF 90° Slip Fitter
 - LY Large Yoke
 - ASF Adjustable Slip Fitter
 - UB U-Bracket
 - WB Wall Bracket
 - HSS House Side Shield
 - SP Surge Protection
 - D10 0-10V Dimming
 - CC Custom Color

SPECIFICATIONS

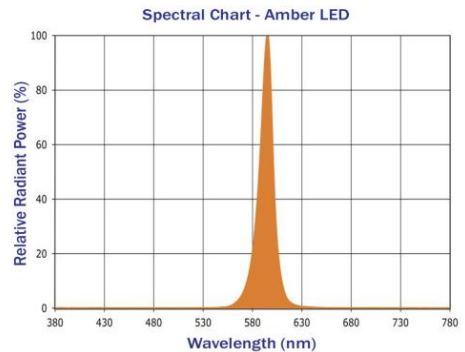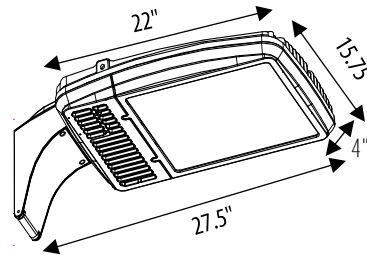


OPTIONS/ACCESSORIES



AM Arm Mount



SF 90° Slip Fitter



LY Large Yoke



ASF Adjustable Slip Fitter



UB U-Bracket



WB Wall Bracket



GS House Side Shield



Specifications Subject to Change