

BL Series

Round Dome Top Bollard with Louvers



BL Series

SPECIFICATIONS

- Extruded Aluminum Housing
- Die Cast Aluminum Base and Top
- Cast Aluminum Louvers
- Clear Polycarbonate Lens
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- Various Wattages Available
- 3K, 4K, 5K or Turtle LED Color Options
- Optional House Side Shield
- Optional Surge Protection

APPLICATIONS

- General Area/Pathway Lighting
- Entries, Walkways, Pathways, Area
- Schools, Hospitals, Offices, Commercial Buildings
- Ingress/Egress, Campuses

ELECTRICAL

- 120-277V; 50/60Hz: LED 15W & CF 42W & 57W
- Quad: MH & HPS 50W, 70W & 100W
- 480V: MH & HPS 70W & 100W & LED 15W
- 120V: HPS 35W, 50W, 70W & 100W

INSTALLATION

- Bolt to Concrete Base or Use Direct Bury Option

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations


**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: BL M 100 Q BZ L

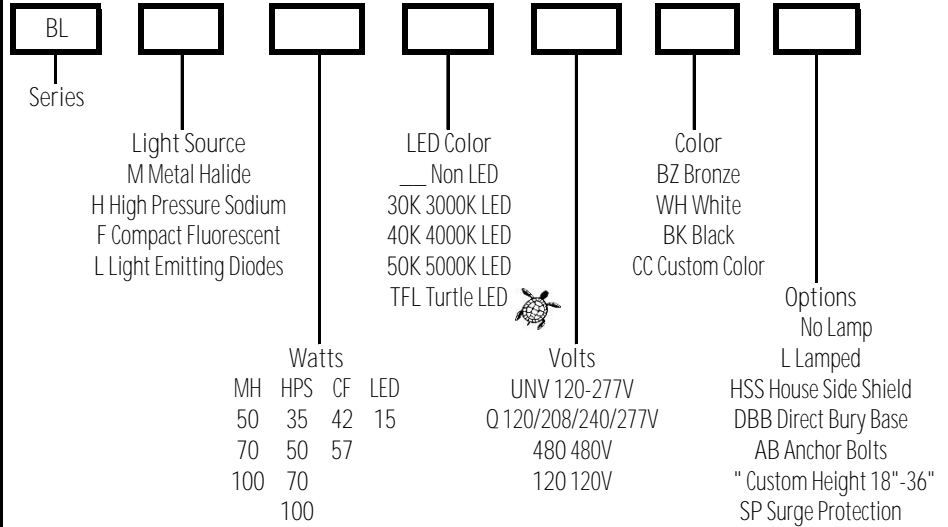

SPECIFICATIONS

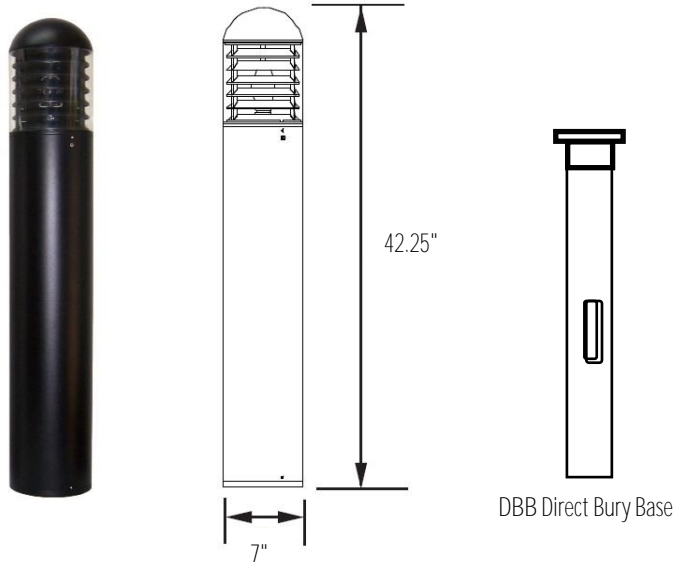

OPTIONS/ACCESSORIES



AB Anchor Bolts



HSS House Side Shield



Specifications Subject to Change