

BSR Series

Square Flat Top Bollard with Cone Reflector



BSR Series

SPECIFICATIONS

- Extruded Aluminum Housing
- Die Cast Aluminum Base and Top
- Internal Cone Reflector
- Clear Polycarbonate Lens
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- Various Wattages Available
- 3K, 4K, 5K or Turtle LED Color Options
- Optional House Side Shield
- Optional Surge Protection

APPLICATIONS

- General Area/Pathway Lighting
- Entries, Walkways, Pathways, Area
- Schools, Hospitals, Offices, Commercial Buildings
- Ingress/Egress, Campuses

ELECTRICAL

- 120-277V 50/60Hz: LED 15W & CF 42W & 57W
- Quad: MH & HPS 50W, 70W & 100W
- 480V: MH & HPS 70W & 100W LED 15W
- 120V: HPS 35W, 50W, 70W & 100W

INSTALLATION

- Bolt to Concrete Base or Use Direct Bury Option

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: BSR M 100 Q BZ L

BSR						
Series	Light Source M Metal Halide H High Pressure Sodium F Compact Fluorescent L Light Emitting Diodes	Watts MH HPS CF LED 50 35 42 15 70 50 57 100 70 100		LED Color ___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED TFL Turtle LED	Volts UNV 120-277V Q 120/208/240/277V 480 480V 120 120V	Color BZ Bronze WH White BK Black CC Custom Color
						Options No Lamp L Lamped HSS House Side Shield DBB Direct Bury Base AB Anchor Bolts " Custom Height 18" -36" SP Surge Protection

SPECIFICATIONS

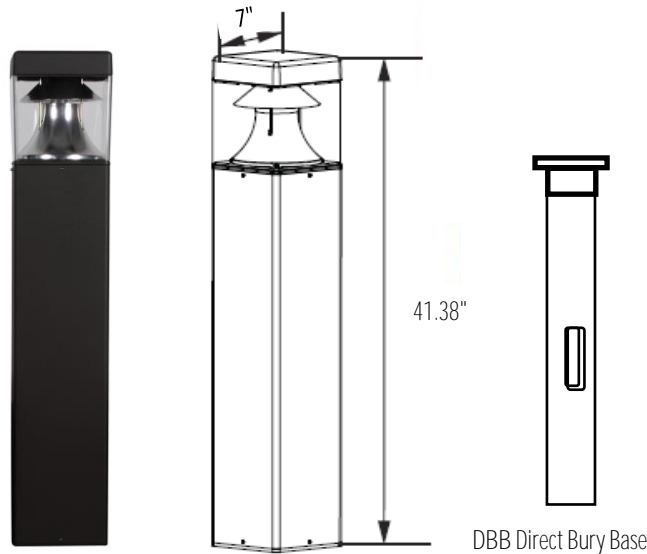

OPTIONS/ACCESSORIES



AB Anchor Bolts



HSS House Side Shield



Specifications Subject to Change