

CVSL LED Series

LED Large Canopy Vandal Square



CVSL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Prismatic Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- 3K, 4K or 5K LED Color Options
- Stainless Steel Hardware
- Optional Emergency Battery
- Optional Surge Protection
- Optional Dimming
- Optional Photocell

APPLICATIONS

- General Area/Garage Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 45 Watts; 6,267 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CVSL L 45 40K UNV

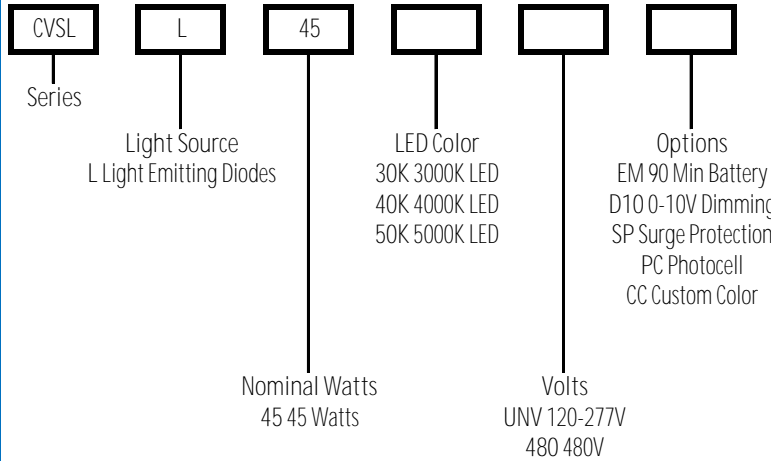

SPECIFICATIONS

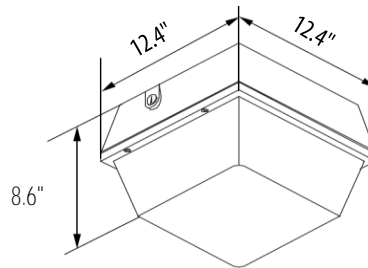

OPTIONS/ACCESSORIES

Specifications Subject to Change

