

ESW LED Series

LED Economy Small Wall Pack



ESW LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Borosilicate Tempered Glass Lens
- Bronze Powder Coat Finish
- CRI LED Light Engine
- Universal Volt 120-277V, Optional 480V
- 4K or 5K LED Color Options
- Corrosion Resistant Hardware
- Fully Sealed and Gasketed
- Optional Photocell

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 30 Watts; 3,200 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ESW L 30 40K UNV

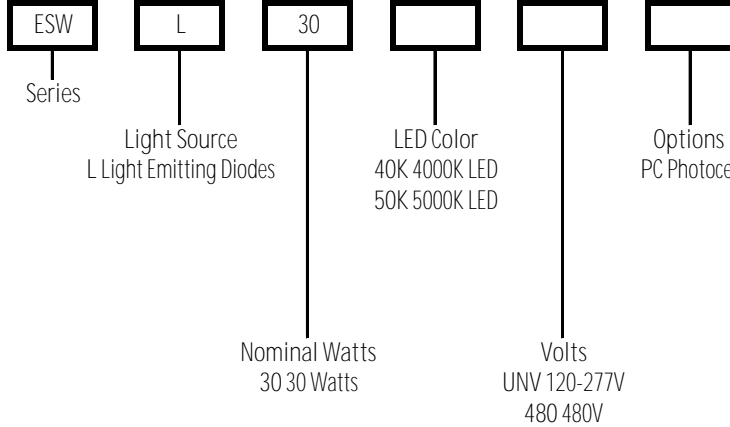

SPECIFICATIONS

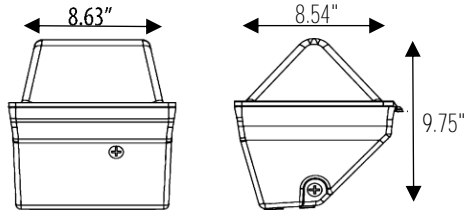

OPTIONS/ACCESSORIES

Specifications Subject to Change

