



IP LED Series

**SPECIFICATIONS**

- Heavy Duty Die Cast Aluminum Housing
- Gray Powder Coat Finish, Optional Custom Color
- Clear Tempered Flat Glass Lens
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- 3K, 4K, 5K or TFL Turtle LED Color Options
- Optional Reflector or Angled Reflector
- Optional Round or Square Swivel Mount
- Optional Goose Hook Large or Small
- Optional Dimming

**APPLICATIONS**

- General Area Lighting
- Industrial Plants, Public Transportation
- Commercial Walkways, Weather Exposed Areas
- Institutional, Vandal Resistant, Loading Docks

**ELECTRICAL**

- 120-277V; 50/60Hz
- 23 Watts; 3,385 Lumens

**INSTALLATION**

- 3/4" NPS for Pendant Mount (Conduit by Others)
- Optional Wall Mount with Goose Hook

**CERTIFICATIONS/LISTINGS**

- CSA Listed
- IP66
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: IP L 23 40K UNV

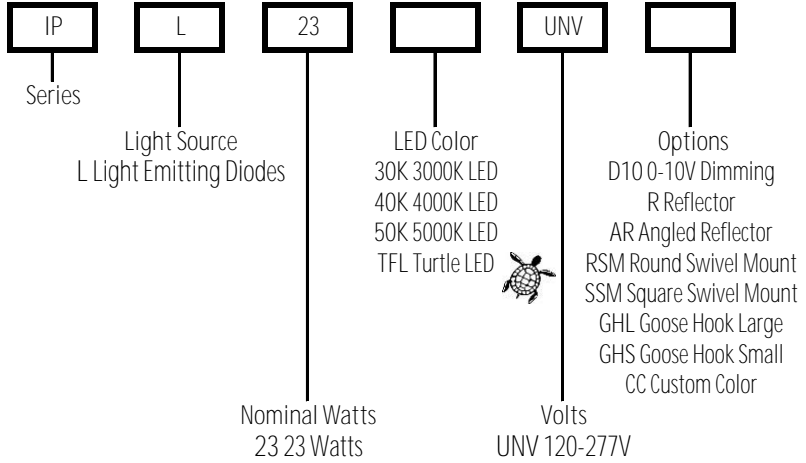

**SPECIFICATIONS**



**OPTIONS/ACCESSORIES**



R Reflector





AR Angled Reflector



RSM Round Swivel Mount



SSM Square Swivel Mount

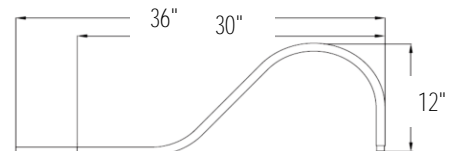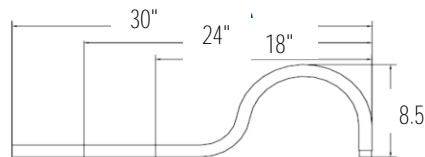

Specifications Subject to Change

