IW LED Series

SPECIFICATIONS
- Heavy Duty Die Cast Aluminum Housing
- Gray Powder Coat Finish, Optional Custom Color
- Clear Tempered Flat Glass Lens
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- 3K, 4K, 5K or TFL Turtle LED Color Options
- Optional Dimming

APPLICATIONS
- General Area Lighting
- Industrial Plants, Public Transportation
- Commercial Walkways, Weather Exposed Areas
- Institutional, Vandal Resistant, Loading Docks

ELECTRICAL
- 120-277V; 50/60Hz
- 23 Watts; 3,385 Lumens

INSTALLATION
- Wall Mount Over Recessed Box or Surface Conduit

CERTIFICATIONS/LISTINGS
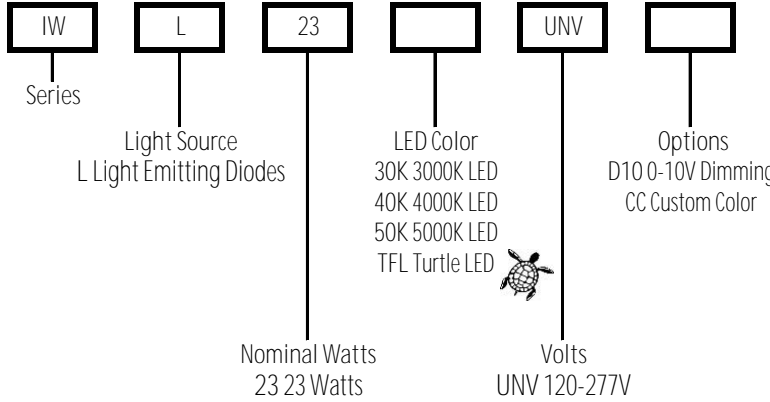- CSA Listed
- IP66
- Listed for Wet Locations

---

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION: EXAMPLE: IW L 23 40K UNV

| IW | L | 23 | | UNV | |

Series

Light Source
L Light Emitting Diodes

LED Color
30K 3000K LED
40K 4000K LED
50K 5000K LED
TFL Turtle LED

Options
D10 0-10V Dimming
CC Custom Color

Nominal Watts
23 23 Watts

Volts
UNV 120-277V

SPECIFICATIONS

7.25"

12"

OPTIONS/ACCESSORIES

CRI◆LED

Specifications Subject to Change

AMERICA LIGHT