



RSL LED Series

SPECIFICATIONS

- Cold Forged Aluminum Housing
- Standard 120 Degree Glass Lens, Optional 30 or 60 Degree Polycarbonate Lens
- Optional 90 Degree Aluminum Reflector
- Black Powder Coat Finish
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 4K or 5K LED Color Options
- Intergal Heat Sinking
- Stainless Steel Hardware
- Optional Visor
- Optional Yoke Mount, Surface or Signal Slip Fitter

APPLICATIONS

- General Area Lighting
- Car Lots, Ball Parks, Sports Arenas
- Tennis Courts, Outdoor Stadiums
- Warehouses, Manufacturing Plants

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 450 Watt; 72,000 Lumens
- 600 Watt; 96,000 Lumens

INSTALLATION

- Yoke Mount, Surface Mount or Slip Fitter
- Slip Fitter for 2 3/8" Pipe (Pipe By Others)

CERTIFICATIONS/LISTINGS

- ETL Listed
- DLC Design Lights Consortium, Premium Quality Meets the Requirements for the Highest DLC Qualification for Efficacy and Lumen Maintenance
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: RSL L 450 40K UNV

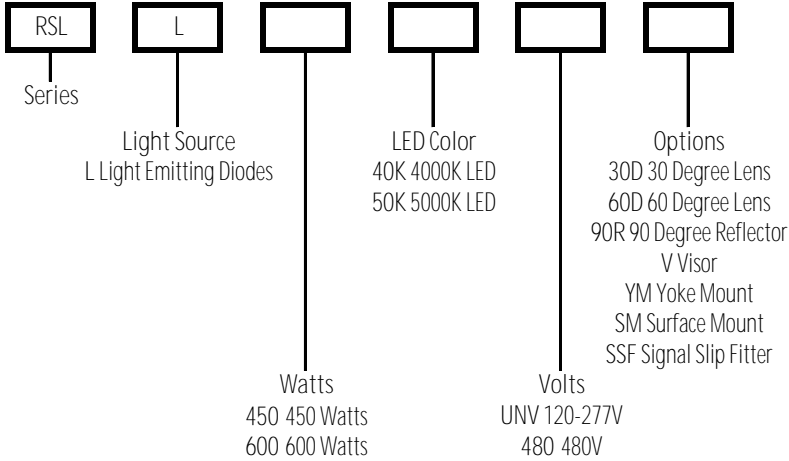

SPECIFICATIONS

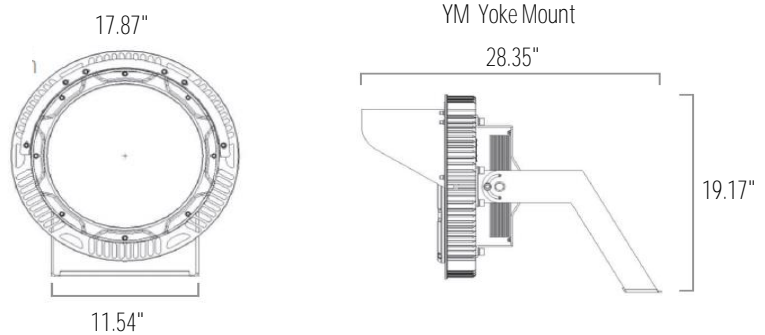

OPTIONS/ACCESSORIES

30° or 60° Lens



90R 90° Reflector



V Visor



YM Yoke Mount



SM Surface Mount



SSF Signal Slip Fitter



Specifications Subject to Change

