

SMF LED Series

Stealth Medium LED Flood



SMF LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Impact Resistant Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Custom Colors
- CRI LED Module
- Universal Volt Electronic Driver 120-277V
- 3K or 5K LED Color Options
- Integral Heat Sinking

APPLICATIONS

- General Area Lighting/Sign Lighting
- Industrial Parks, Public Transportation, Airports
- Office Buldings, Medical Facilities, Communities

ELECTRICAL

- 120-277V; 50/60Hz
- 30 Watts; 3,135 Lumens; 3000K
- 30 Watts; 3,538 Lumens; 5000K

INSTALLATION

- Mounts with 1/2" Threaded Knuckle or
Optional Yoke Mount

CERTIFICATIONS/LISTINGS


- UL Listed
- IP65
- Listed for Wet Locations

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: SMF L 30 50K UNV

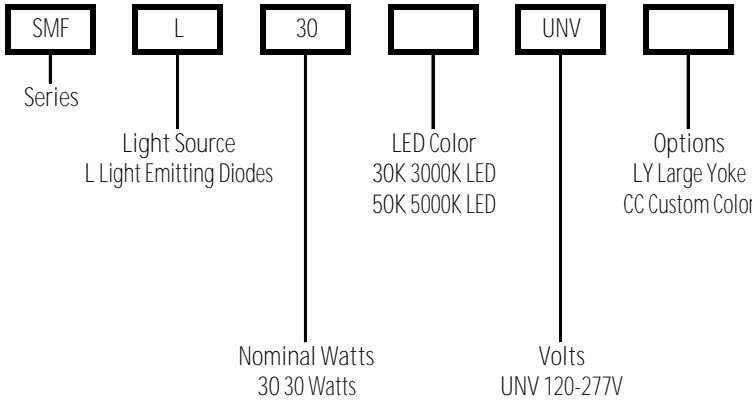

SPECIFICATIONS

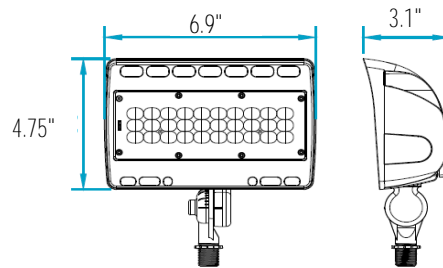

OPTIONS/ACCESSORIES



LY Large Yoke



Specifications Subject to Change

