



SPL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Polycarbonate Lens
- Black Powder Coat Finish
- High Performance LED's
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- Yoke Mount
- Adjustable Light Angle up to 240°
- 30° Beam Spread
- Stainless Steel Hardware
- Optional Surge Protection

APPLICATIONS

- General Area Lighting
- Car Lots, Ball Parks, Sports Arena
- Tennis Courts, Outdoor Stadiums

ELECTRICAL

- 120-277V 50/60Hz
- 300 Watts; 40,032 Lumens

INSTALLATION

- Yoke Mount

CERTIFICATIONS/LISTINGS

- IP66
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: SPL L 300 50K UNV

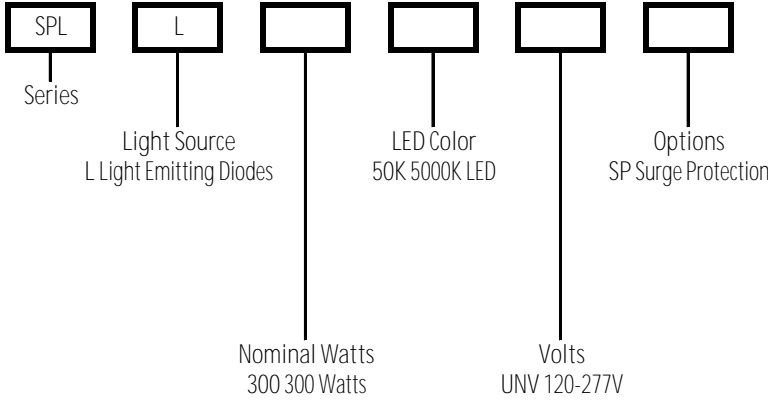

SPECIFICATIONS

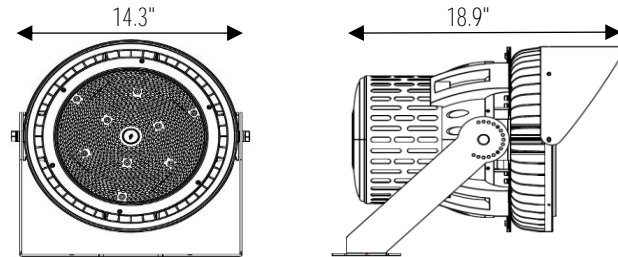

OPTIONS/ACCESSORIES

Specifications Subject to Change

