



SSB LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Polycarbonate Lens
- Bronze Powder Coat Finish Standard, Optional Black, White or Gray Finish
- CRI LED Board
- Universal Volt LED Board 120-277V or 12 Volt Low Voltage
- 3K or 5K LED Colors
- Sealed with High Grade Weatherproof Silicone Gasket
- 30 Degree Narrow Beam Spread or 60 Degree Medium Beam Spread

APPLICATIONS

- General Area Lighting
- Driveways, Walkways, Campuses, Pathways
- Schools, Commercial Buildings, Communities

ELECTRICAL

- 120-277V; 50/60Hz
- 12V Low Voltage
- 15 Watts; 1,536 Lumens; 3000K
- 15 Watts; 1,700 Lumens; 5000K

INSTALLATION

- Mounts with 1/2" Threaded Knuckle

CERTIFICATIONS/LISTINGS

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: SSB L 15 NFL 30K UNV BZ

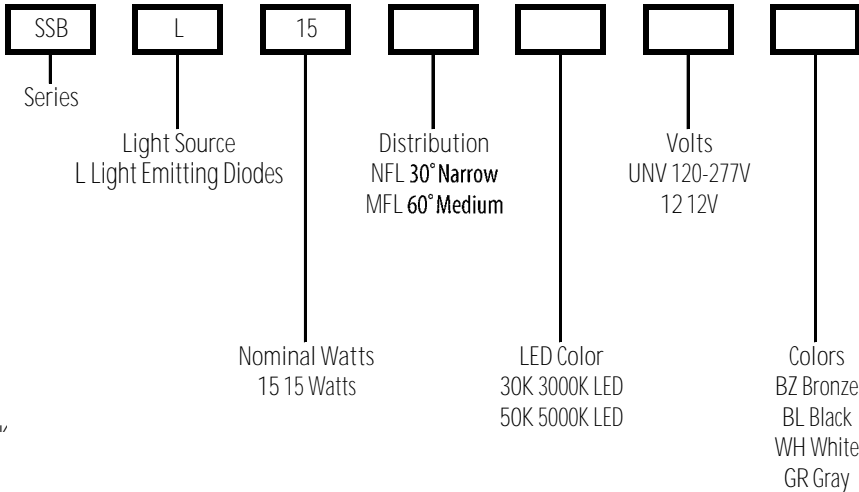

SPECIFICATIONS

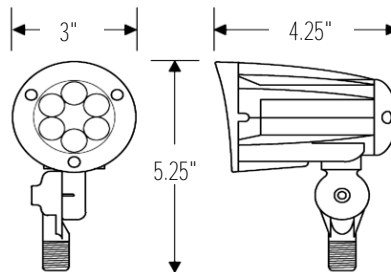

OPTIONS/ACCESSORIES



Specifications Subject to Change