

WFM Series

Medium Full Cut Off Wall Pack



WFM Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Full Cut Off Front Frame
- Internal Aluminum Reflector (Non LED)
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K, 5K or Turtle Amber LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Skylight Friendly
- Optional Emergency Battery (CF/LED)
- Optional Photocell
- Optional Surge Protection
- Optional Wire Guard or Vandal Guard

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V: LED37W & CF 26W, 32W, 42W, 52W, 64W & 84W
- 120V: HPS 35W, 50W, 70W, 100W & 150W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS


- CSA Listed
- Listed for Wet Locations




PROJECT _____ TYPE _____
 QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WFM M 100 Q L

WFM					
Series	Light Source		LED Color		Options
M Metal Halide	H High Pressure Sodium		___ Non LED		L Lamped
F Compact Fluorescent	L Light Emitting Diodes		30K 3000K LED		PC Photocell
			40K 4000K LED		EM 90 Min Battery (CF/LED)
			50K 5000K LED		D10 0-10V Dimming (LED)
			TFL Turtle LED 		SP Surge Protection
					WG Wire Guard
					VG Vandal Guard
					CC Custom Color
		Watts		Volts	
		MH HPS CF 2CF LED		120 120V	
		50 35 26 52 37		UNV 120-277V	
		70 50 32 64		Q 120/208/240/277V	
		100 70 42 84			
		150 100			
		150			

SPECIFICATIONS

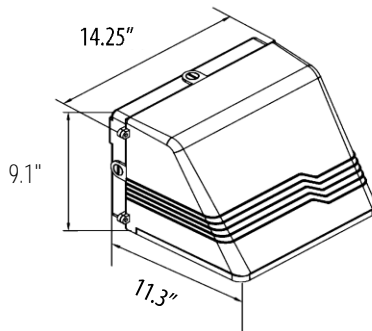

OPTIONS/ACCESSORIES



WG Wire Guard



VG Vandal Guard

Specifications Subject to Change

