

WPAM Series

Medium Adjustable Wall Pack



WPAM Series

SPECIFICATIONS

- Die Cast Housing
- Tempered Flat Clear Glass Lens
- Uniform Poured Silicone Gasket
- Aluminum Reflector
- Bronze Powdercoat Finish, Optional Custom Color
- Housing Swivels from 0° to 30°
- Porcelain 4KV Socket, Medium Base or 5KV Socket Mogul Base
- Optional Lamped
- Optional Adjustable Slip Fitter

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120V 50/60Hz (HPS or MH 35W, 50W, 70W, 100W & 150W)
- 120-277V 50/60Hz (HPS or MH 50W)
- 120/208/240/277V 50/60Hz (HPS or MH 70W, & 100W) (PMH 150W)

INSTALLATION

- Mounts on Adjustable Slipfitter

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WPAM H 35 120

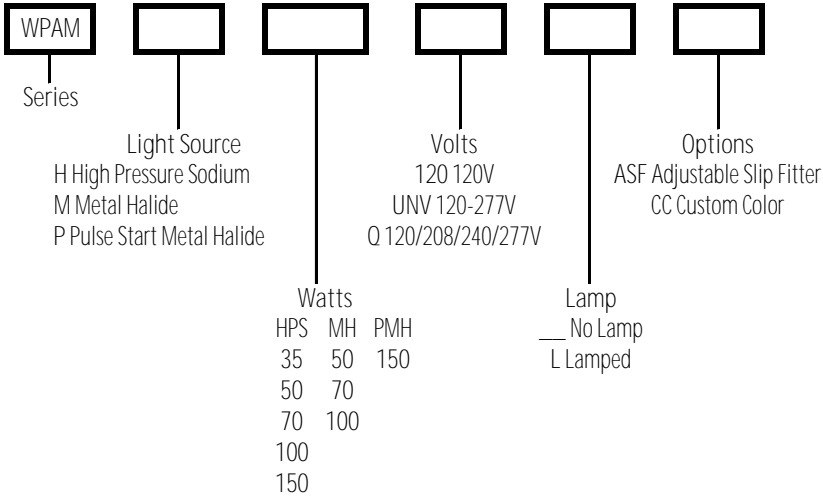

SPECIFICATIONS



OPTIONS/ACCESSORIES

ASF Adjustable Slip Fitter



Specifications Subject to Change

