



WPSG LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Borosilicate Molded Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Stainless Steel Hardware
- Optional Surge Protection
- Optional Dimming
- Optional Photocell
- Optional Wire Guard, Glare Shield and Full Cut Off

**APPLICATIONS**

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

**ELECTRICAL**

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 23 Watts; 2,860 Lumens

**INSTALLATION**

- Mounts Over Recessed Box or with Surface Conduit

**CERTIFICATIONS/LISTINGS**

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: WPSG L 23 50K UNV

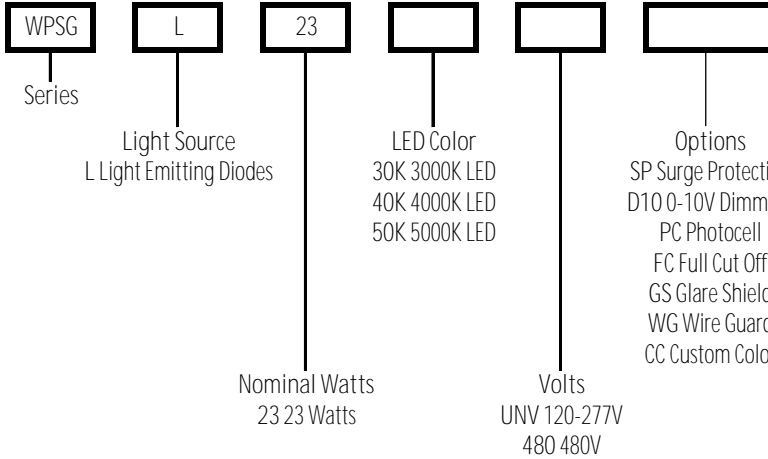


**SPECIFICATIONS**

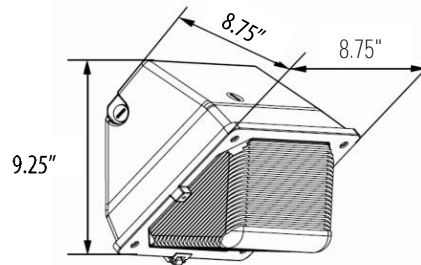


**OPTIONS/ACCESSORIES**



FC Full Cut Off



GS Glare Shield



WG Wire Guard



Specifications Subject to Change