

WPSS LED Series

LED Soft Square Wall Pack



WPSS LED Series

SPECIFICATIONS

- Die Cast Aluminum Back Housing
- Polycarbonate Lens
- Bronze Powdercoat Finish
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Surge Protection
- Optional Dimming

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 33 Watts; 3,114 Lumens

INSTALLATION

- Mounts Over Recessed Box or Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WPSS L 33 50K UNV

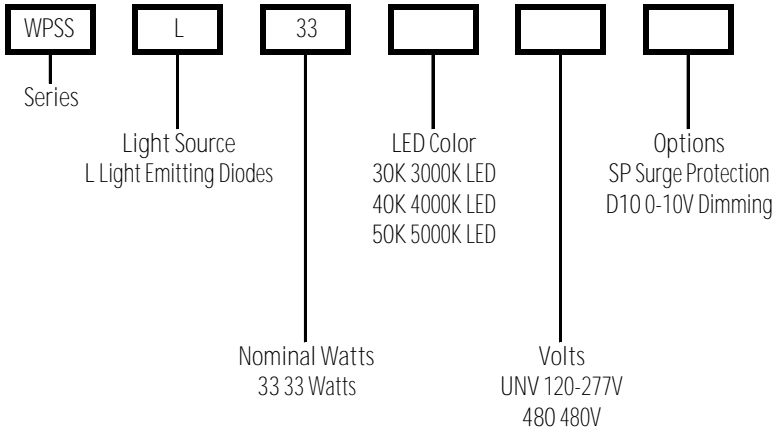

SPECIFICATIONS



OPTIONS/ACCESSORIES

Specifications Subject to Change

