



WPSS Series

SPECIFICATIONS

- Die Cast Aluminum Back Housing
- Polycarbonate Lens
- Aluminium Reflector (Non LED)
- Bronze Powder Coat Finish
- CF Plug-In Type, GX24Q (Non LED)
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Dimming
- Optional Emergency Battery
- Optional Surge Protection

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V; 50/60Hz: CF 26W, 32W, 42W, 52W, 64W & 84W & LED 33W

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WPSS F 26 UNV L

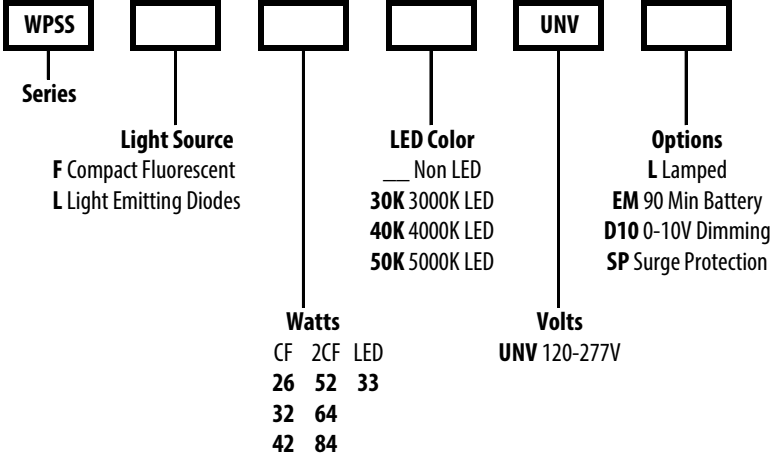

SPECIFICATIONS



OPTIONS/ACCESSORIES

Specifications Subject to Change

