



WSLD LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Tempered Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 4K LED Color
- Stainless Steel Hardware
- Optional Surge Protection
- Optional Dimming
- Optional Photocell

APPLICATIONS

- General Area, Façade, and Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings
- Warehouse/Industrial Facilities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 58 Watts; 7,820 Lumens

INSTALLATION

- Mount over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WSLD L 58 UNV 40K

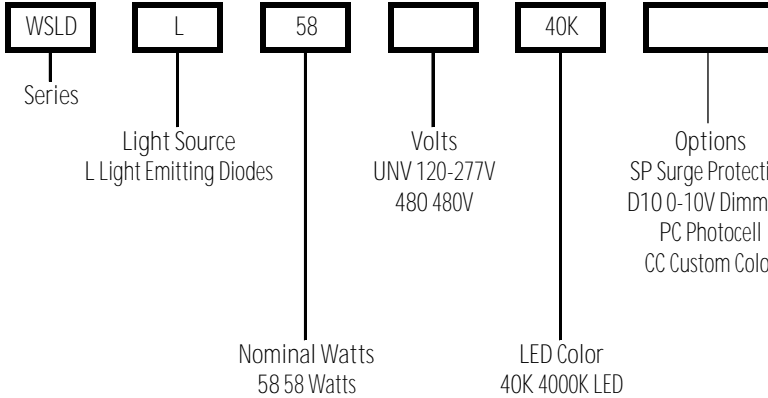

SPECIFICATIONS

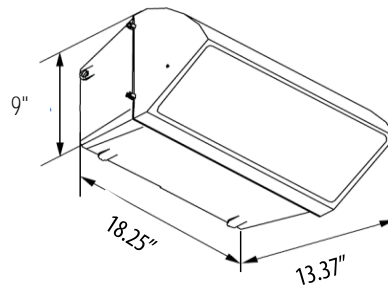

OPTIONS/ACCESSORIES



Specifications Subject to Change