



APT LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Polycarbonate Lens
- Black Powder Coat Finish
- CRI LED Aluminum Substrate Board
- Universal Volt Electronic Driver 120-277V
- 5000K LED Color
- Integral Heat Sinking
- Beam Angle 120 Degrees, Uniform 360 Degree Pattern

APPLICATIONS

- General Area Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Residential Roadways, Campuses, Office Buildings

ELECTRICAL

- 120-277V 50/60Hz
- 75 Watts; 9,000 Lumens

INSTALLATION

- Slips on 2.38" Posts or Tenons

CERTIFICATIONS/LISTINGS

- ETL Listed
- IP67
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: APT L 75 50K UNV

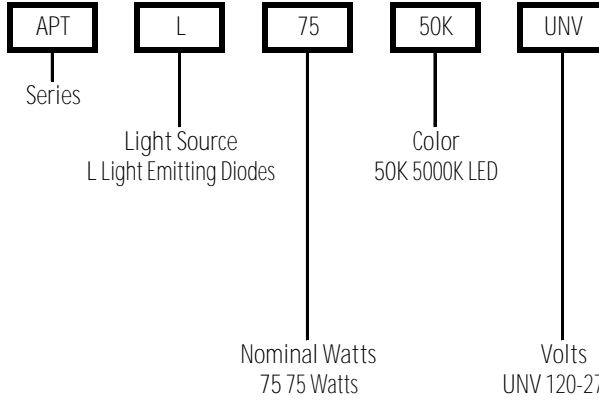

SPECIFICATIONS



OPTIONS/ACCESSORIES



Specifications Subject to Change