



FLL Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Tempered Flat Glass Lens
- Aluminum Reflector
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Mogul Base 5KV Socket
- Stainless Steel Hardware
- Multiple Light Source Options
- Universal Volt LED Driver with Optional Dimming
- 3K, 4K or 5K LED Color Options
- Optional Wire Guard, Glare Shield or Vandal Guard

**APPLICATIONS**

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

**ELECTRICAL**

- Quad Volt: HPS 250W & 400W, PMH 250W, 320W & 400W
- UNV: 120-277V; LED 77W
- 480V: HPS 250W & 400W, PMH 250W, 320W & 400W

**INSTALLATION**

- Mounts with 6" Mounting Arm (Round or Square) or 10" Arm for Direct Pole Mount, Adjustable Slip Fitter, U-Bracket or Large Yoke

**CERTIFICATIONS/LISTINGS**

- CSA Listed
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**


EXAMPLE: FLL P 250 Q L

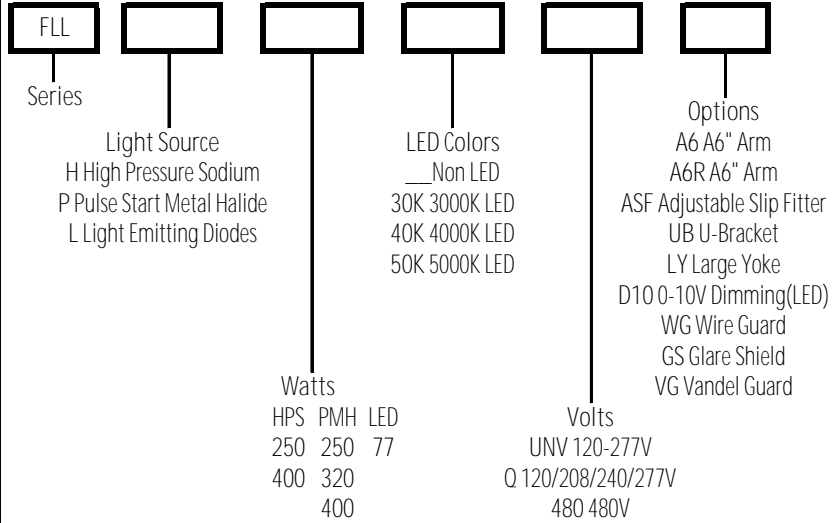


**SPECIFICATIONS**

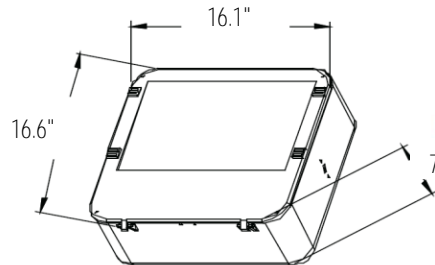

**OPTIONS/ACCESSORIES**



A6 (R) 6" Arm  
A10 10" Arm



ASF Adjustable Slip Fitter



UB U-Bracket




LY Large Yoke





WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change

