



KTEB-140-1-TP-EMI

T12 ELECTRONIC BALLAST



DESCRIPTION

1 x F40T12 | 120V Input | Normal Power Factor | Rapid Start | 6" Case

STARTING METHOD: Rapid
LAMP CONNECTION: N/A
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

Lamp Type	No. of Lamps	Input Volts	Input Watts	Input Current	Power Factor	Crest Factor	Ballast Factor	Ballast Efficacy Factor	Max. THD
F40T12 (40W)	1	120V	36.0W	0.53A	0.57	1.58	0.88	2.44	150%
F34T12 (34W)	1	120V	30.0W	0.45A	0.55	1.50	0.88	2.93	150%
F40T12 (25W)	1	120V	36.0W	0.53A	0.57	1.54	1.33	3.69	150%
F30T12 (30W)	1	120V	28.0W	0.41A	0.58	1.51	0.93	3.32	150%

WIRING DIAGRAMS

F1-3

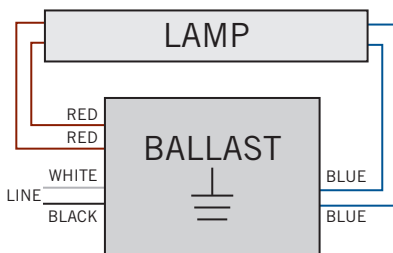



KTEB-140-1-TP-EMI

T12 ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS


	LENGTH	6.46"
	WIDTH	1.32"
	HEIGHT	1.00"
	MOUNTING	6.00"
	CASE STYLE	L7

STANDARD LEAD LENGTHS*

BLACK	18"
WHITE	18"
BLUE	36"
RED	26"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

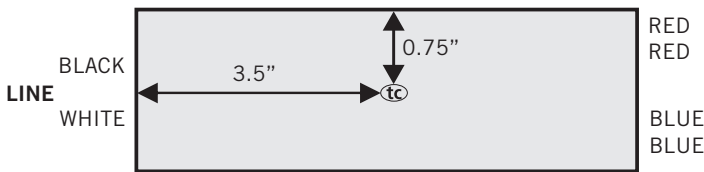

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-140-1-TP-EMI /C-BP	Bulk Pack	2,200	Special Order
KTEB-140-1-TP-EMI /C-CP	Carton Pack	20	Quick Ship
KTEB-140-1-TP-EMI /C-DP	Distributor Pack	20	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-140-1-TP-EMI /C-BP

