



SMB LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Black, White or Gray Finish
- CRI LED Board
- Universal Volt LED Board 120-277V or 12V Low Voltage
- 3K, 4K or 5K LED Color
- Sealed with High Grade Weatherproof Silicone Gasket
- 30 Degree Narrow Beam Spread or 60 Degree Medium Beam Spread

APPLICATIONS

- General Area Lighting
- Driveways, Walkways, Campuses, Pathways
- Schools, Commercial Buildings, Communities

ELECTRICAL

- 120-277V; 50/60Hz
- 12V Low Voltage
- 28 Watts; 2,724 Lumens; 3000K
- 28 Watts; 2,900 Lumens; 4000K
- 28 Watts; 3,200 Lumens; 5000K

INSTALLATION

- Mounts with 1/2" Threaded Knuckle

CERTIFICATIONS/LISTINGS

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: SMB L 28 NFL 30K UNV

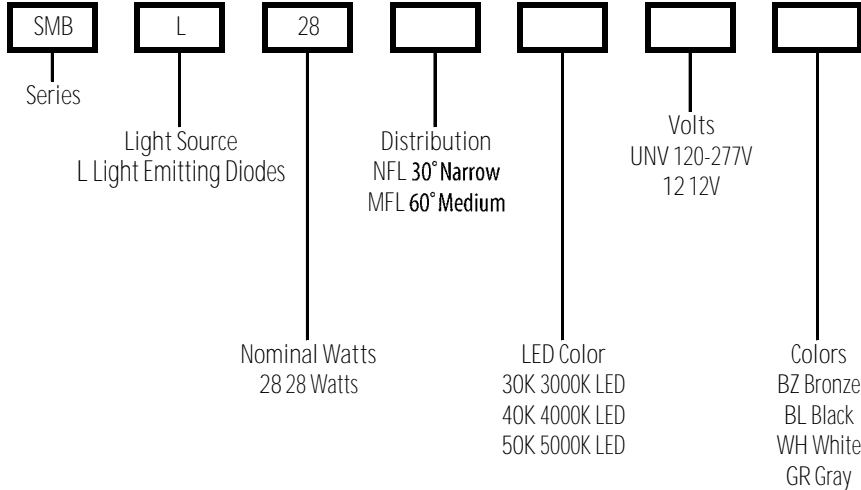

SPECIFICATIONS

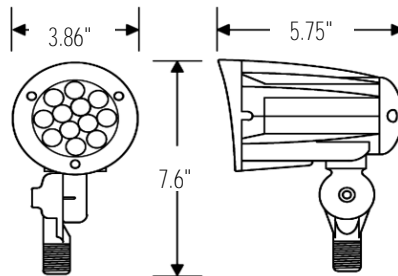

OPTIONS/ACCESSORIES



Specifications Subject to Change