

ABM LED Series

Aero Beam Medium LED Parking and Area



ABM LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing and Front Frame
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Stainless Steel Hardware
- Choice of Distribution
- Optional Surge Protection
- Optional Glare Shield

APPLICATIONS

- General Area/Pathway Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 37 Watts; 4,405 Lumens

INSTALLATION

- Mounts Direct to a Square Pole, Optional Round Pole Adapter or Wall Bracket

CERTIFICATIONS/LISTINGS


- CSA Listed
- IP65
- Listed for Wet Locations

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ABM L 37 T3 50K UNV

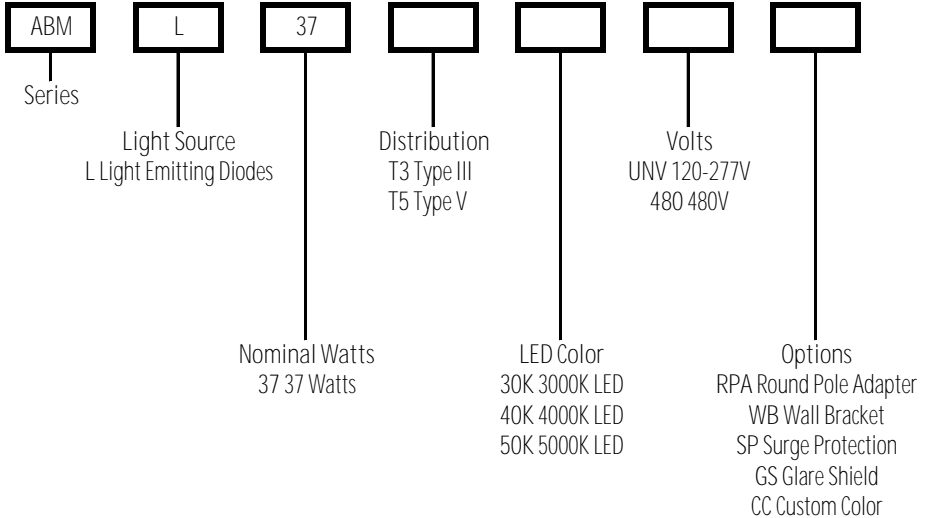

SPECIFICATIONS

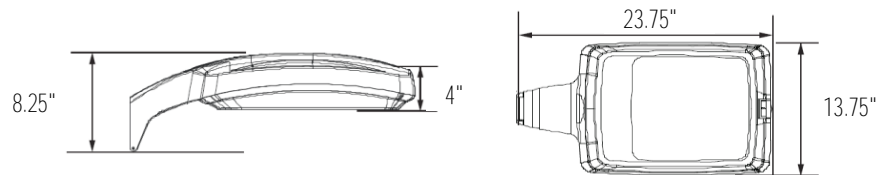

OPTIONS/ACCESSORIES



RPA Round Pole Adapter



WB Wall Bracket



GS Glare Shield



Specifications Subject to Change

