



ALL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optimal 480V
- 3K, 4K or 5K LED Color Options
- Optional Surge Protection
- Optional Wire Guard or Glare Shield

APPLICATIONS

- General Area Lighting
- Parking, Roadway, Area
- Schools, Commercial Buildings, Communities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 88 Watts; 7,213 Lumens

INSTALLATION

- Mounts with 6" Arm (Round/ Square) for Direct Pole Mount or to Slip Fitter or Mounts with Adjustable Slip Fitter, U-Bracket or Yoke Mount.

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ALL L 88 40K UNV

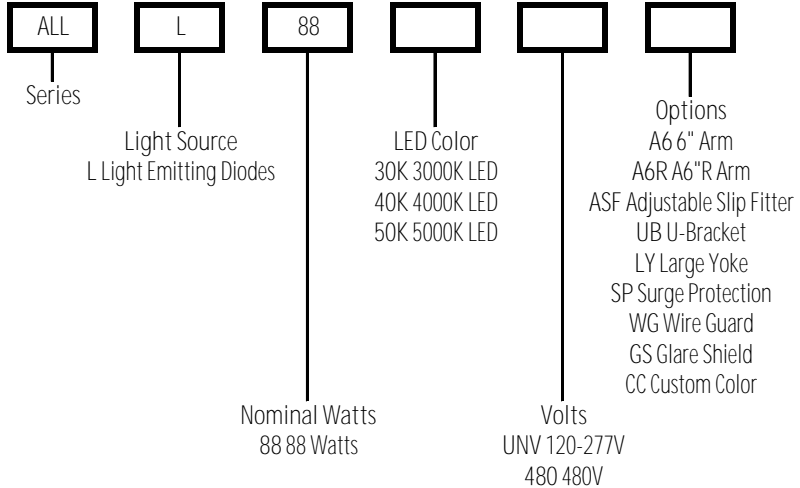


SPECIFICATIONS

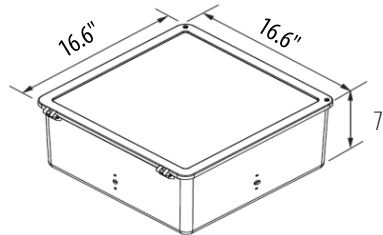


OPTIONS/ACCESSORIES




A6 (R) A6" Arm




ASF Adjustable Slip Fitter




UB U-Bracket



LY Large Yoke



WG Wire Guard



GS Glare Shield

Specifications Subject to Change

