ASM LED Series

LED Medium Square Area Light



ASM LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Flat Clear Glass Lens
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Emergency Battery
- Optional Surge Protection
- Optional Wire Guard or Glare Shield

APPLICATIONS

- General Area/Pathway Lighting
- · Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL


- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 56 Watts; 5,023 Lumens

INSTALLATION


 Mounts with 6" Arm (Round/ Square) for Direct Pole Mount or to Slip Fitter or Mounts with Adjustable Slip Fitter or U-Bracket or Yoke Mount

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- · Listed for Wet Locations

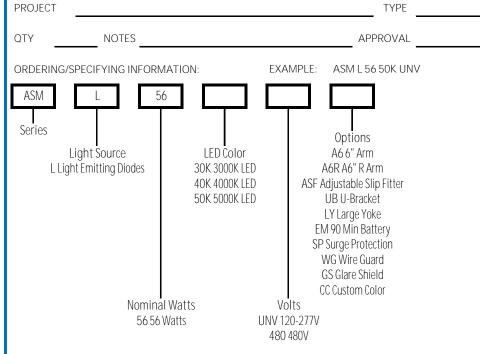

SPECIFICATIONS



OPTIONS/ACCESSORIES



A6 (R) A6" Arm



ASF Adjustable Slip Fitter



UB U-Bracket



LY Large Yoke



WG Wire Guard



GS Glare Shield





Specifications Subject to Change