



EWL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- U-V-Resistant Polycarbonate Lens
- Adjustable Range from Full-Cut Off to Forward Throw
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- 3K, 4K or 5K LED Color Options
- Heavy Duty, Spring Loaded Hinge provides Vertical Adjustability of the Luminaire Housing up to 65°
- Optional Photocell

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V; 50/60Hz
- 30 Watts; 3,298 Lumens
- 50 Watts; 5,287 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: EWL L 30 30K UNV

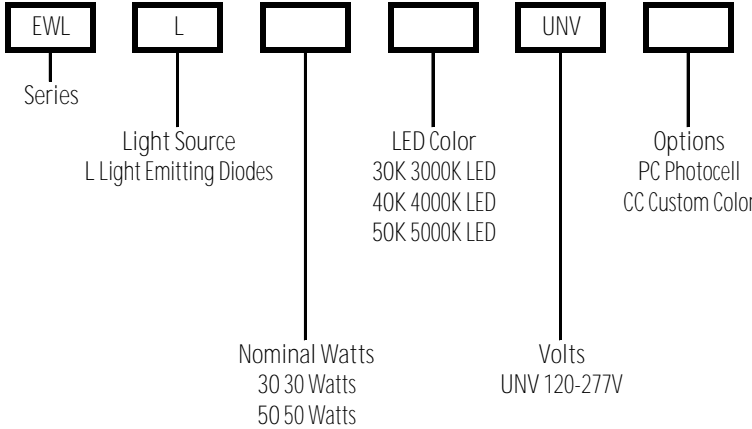

SPECIFICATIONS

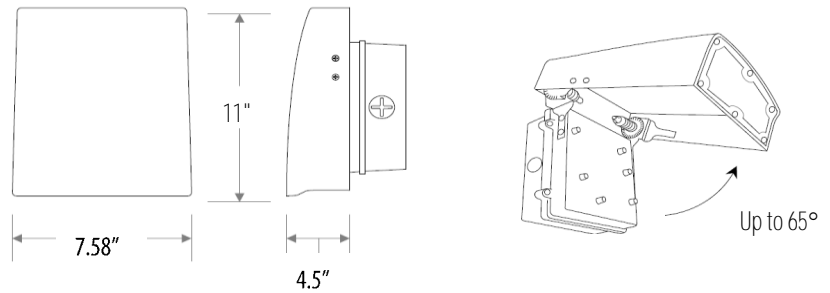

OPTIONS/ACCESSORIES

Specifications Subject to Change

