

MSP LED Series

LED Metropolitan Small Post Top



MSP LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Glass Lens Seals LED Array, Optional Poly Diffuser
- Black Powder Coat Finish, Optional Custom Colors
- CRI LED Aluminum Substrate Board
- Universal Volt Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Integral Heat Sinking
- Optional Surge Protection
- 50,000 Hour Life

APPLICATIONS

- General Area Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Residential Roadways, Campuses, Office Buildings

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 37 Watts; 2,832 Lumens
- 65 Watts; 4,975 Lumens
- 84 Watts; 8,398 Lumens

INSTALLATION

- Slips on 3" Posts or Tenons

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: MSP L 84 40K UNV

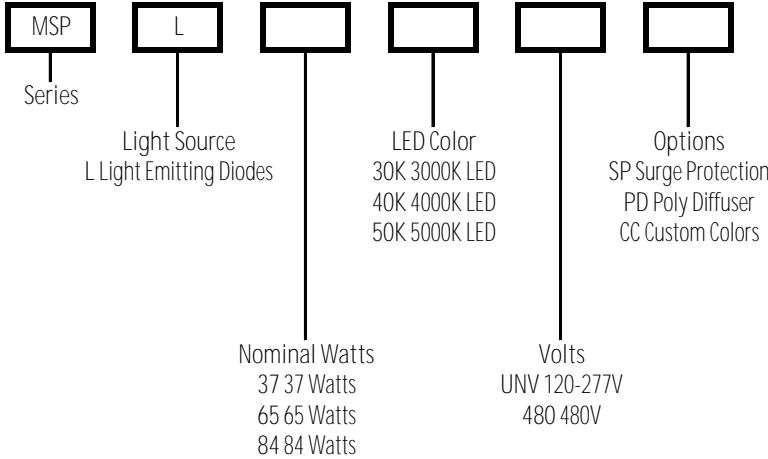

SPECIFICATIONS

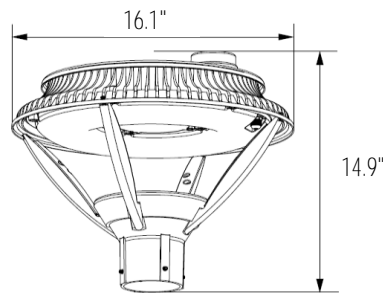

OPTIONS/ACCESSORIES



PD Poly Diffuser



Specifications Subject to Change