

WSR Series

Rectangular Up/Down Wall Sconce



WSR Up/Down Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Lens
- Aluminium Reflector (Non LED)
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- Removable Baffle to Convert from Down Light to Up/Down Light
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q
- Universal Volt LED Driver with Optional Dimming
- 3K, 4K or 5K LED Color Options
- Multiple Light Source Options
- Optional Surge Protection

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120V 50/60Hz: HPS 50W & 70W
- 120-277V 50/60Hz: CF 26W, 32W, 42W, 52W, 64W & 84W & LED 32W
- 120/208/240/277V 50/60Hz: HPS or MH 50W & 70W

INSTALLATION

- Surface Mount Over Recessed Box

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations



PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WSR M 70 Q L

WSR					
Series	Light Source	Watts			Options
	H High Pressure Sodium	HPS	MH	CF	L Lamped
	M Metal Halide	50	50	26	SP Surge Protection
	F Compact Fluorescent	70	70	32	D10 0-10V Dimming (LED)
	L Light Emitting Diodes			42	CC Custom Color
				84	
		LED Color			
				LED	
				30K 3000K	
				40K 4000K	
				50K 5000K	
		Volts			
				120 120V	
				UNV 120-277V	
				Q 120/208/240/277V	

SPECIFICATIONS

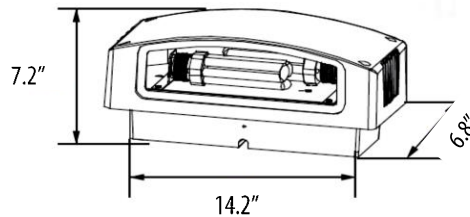

OPTIONS/ACCESSORIES

Specifications Subject to Change

