



PRODUCT FEATURES



STARTING METHOD: Instant	INPUT VOLTAGE: 120-277VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: 20KHz-33KHz

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F96T12 75W	2	120	133.0	1.12	0.99	<1.70	0.88	0.66	10	F2-4
		277	133.0	0.48	0.99	<1.70	0.88	0.66	10	F2-4
	1	120	82.0	0.68	0.99	<1.70	1.05	1.28	10	F1-4
		277	82.0	0.31	0.97	<1.70	1.05	1.28	10	F1-4
F96T12/ES 60W	2	120	117.0	0.98	0.99	<1.70	0.88	0.75	10	F2-4
		277	117.0	0.42	0.98	<1.70	0.88	0.75	10	F2-4
	1	120	72.0	0.60	0.99	<1.70	1.05	1.46	10	F1-4
		277	72.0	0.27	0.96	<1.70	1.05	1.46	10	F1-4
F72T12 57W	2	120	107.0	0.92	0.99	<1.70	0.90	0.84	10	F2-4
		277	107.0	0.40	0.95	<1.70	0.90	0.84	10	F2-4
	1	120	67.0	0.60	0.99	<1.70	1.05	1.57	10	F1-4
		277	67.0	0.26	0.95	<1.70	1.05	1.57	10	F1-4
F48T12 40W	2	120	76.0	0.68	0.99	<1.70	0.92	1.21	10	F2-4
		277	76.0	0.30	0.95	<1.70	0.92	1.21	10	F2-4
F48T12/ES 30W	2	120	64.0	0.60	0.99	<1.70	0.92	1.44	10	F2-4
		277	64.0	0.26	0.95	<1.70	0.92	1.44	10	F2-4

WIRING DIAGRAMS

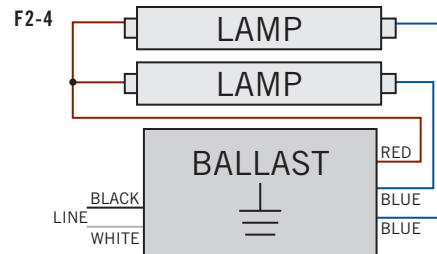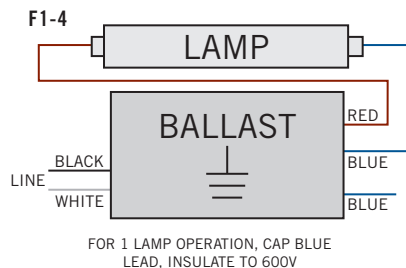




KTEB-275-UV-TP-PIC

T12 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

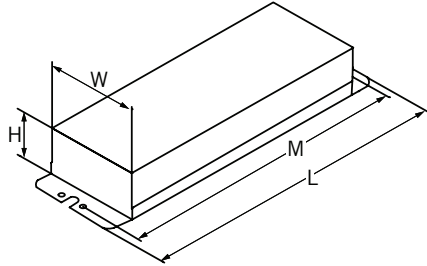

CASE DIMENSIONS


LENGTH: 11.77"
WIDTH: 2.15"
HEIGHT: 1.61"
MOUNTING: 10.82"
UNIT WEIGHT: 2.52 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 58.00" X 58.00"
RED: 66.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

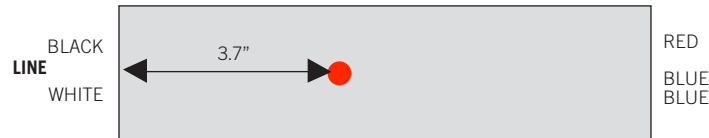

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-275-UV-TP-PIC-DP	Distributor	6	Quick Ship

CATALOG NUMBER BREAKDOWN

KTEB-275-UV-TP-PIC

