

SMB LED Series

Stealth Medium LED Bullet



SMB LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Black, White or Gray Finish
- Sealed with High Grade Weatherproof Silicone Gasket
- Multiple Beam Spread Options
22° / 35° / 57° / 110°
- Universal Volt LED Driver 120-277V
- Small Visor included as Shown

APPLICATIONS

- Landscape Lighting
- General Area Lighting
- Driveways, Walkways, Campuses, Pathways
- Schools, Commercial Buildings, Communities

ELECTRICAL

- 120-277V; 50/60Hz
- 12 Watts; 1,650 Nominal Lumens
- 20 Watts; 2,800 Nominal Lumens
- 28 Watts; 3,900 Nominal Lumens

INSTALLATION

- Mounts with 1/2" Threaded Knuckle

CERTIFICATIONS/LISTINGS

- ETL Listed
- IP65
- Listed for Wet Locations

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: SMB L PS NFL 30K UNV



Series

Light Source
L Light Emitting Diodes

Flood Angle
VNFL 22° Very Narrow
NFL 35° Narrow
FL 57° Flood
WFL 110° Narrow


Nominal Watts
PS Power Selectable
12W/20W/28W

LED Color
CS Color Selectable
3000K/4000K/5000K

BZ Bronze

Optional Colors
BK Black
WH White
SV Silver

SPECIFICATIONS

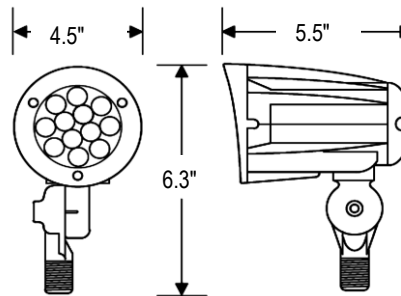

OPTIONS/ACCESSORIES



POST-BK



Specifications Subject to Change